
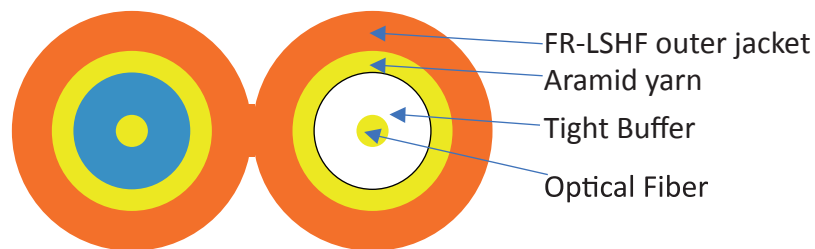


**DESCRIPTION:**

The cable consists of two separate tight buffered fibres and around each buffer is a layer of aramid yarns that act as tensile strength members; the jacket is made from the FR-LSHF compound. Ideal for direct termination with connectors; suitable for the interconnections in buildings and movable connect lines using patch cords.

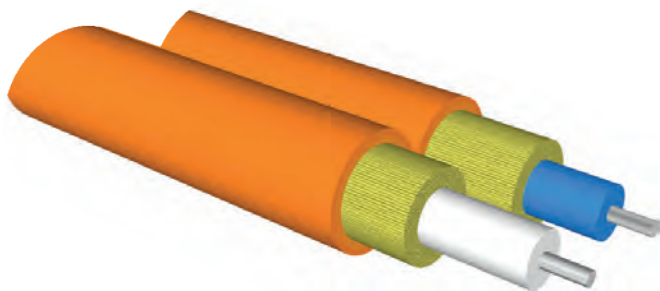

# Zip Cord Cable 2,4 mm

# Zip Cord Cable 2,8 mm

	Ordering Code	Fiber Type	Nominal Diameter mm	Fiber Count	Weight kg/km
SINGLEMODE MULTIMODE	SM -I-DXZ-2(2x2,4)x9AH-D-YE	G.652.D	2.4	2	10.0
	SM -I-DXZ-2(2x2,4)x9AH-DA1-YE	G.652.D/G.657.A1	2.4	2	10.0
	SM -I-DXZ-2(2x2,4)x9AH-A1-YE	G.657.A1	2.4	2	10.0
	SM -I-DXZ-2(2x2,4)x9AH-A2-YE	G.657.A2	2.4	2	10.0
	SM -I-DXZ-2(2x2,4)x9AH-B3-YE	G.657.B3	2.4	2	10.0
	SM -I-DXZ-2(2x2,4)x9AH-OM1-OG	OM1	2.4	2	10.0
	SM -I-DXZ-2(2x2,4)x9AH-OM2-OG	OM2	2.4	2	10.0
	SM -I-DXZ-2(2x2,4)x9AH-OM3-TQ	OM3	2.4	2	10.0
	SM -I-DXZ-2(2x2,4)x9AH-OM4-TQ	OM4	2.4	2	10.0
SINGLEMODE MULTIMODE	SM -I-DXZ-2(2x2,8)x9AH-D-YE	G.652.D	2.8	2	14.5
	SM -I-DXZ-2(2x2,8)x9AH-DA1-YE	G.652.D/G.657.A1	2.8	2	14.5
	SM -I-DXZ-2(2x2,8)x9AH-A1-YE	G.657.A1	2.8	2	14.5
	OPK -I-DXZ-2(2x2,8)x9AH-A2-YE	G.657.A2	2.8	2	14.5
	OPK -I-DXZ-2(2x2,8)x9AH-B3-YE	G.657.B3	2.8	2	14.5
	OPK -I-DXZ-2(2x2,8)x9AH-OM1-OG	OM1	2.8	2	14.5
	OPK -I-DXZ-2(2x2,8)x9AH-OM2-OG	OM2	2.8	2	14.5
	OPK -I-DXZ-2(2x2,8)x9AH-OM3-TQ	OM3	2.8	2	14.5
	OPK -I-DXZ-2(2x2,8)x9AH-OM4-TQ	OM4	2.8	2	14.5