
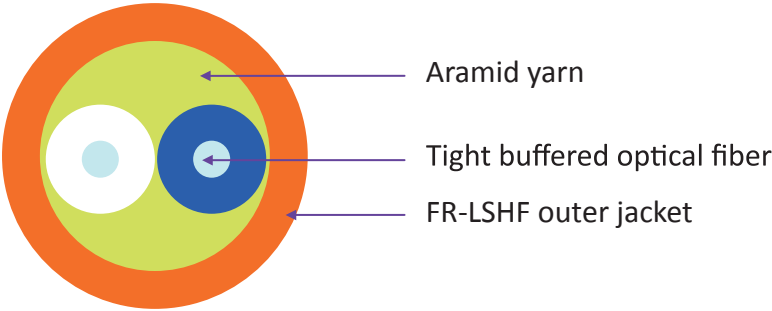


DESCRIPTION:

The cable consists of two tight buffered fibres and the around buffers is a layer of aramid yarns that act as tensile strength members; the jacket is made from the FR-LSHF compound. Ideal for direct termination by connectors; suitable for the interconnections in buildings and movable connect lines using patch cords.

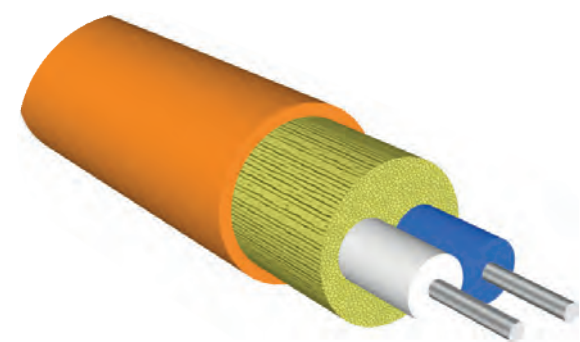

Round Duplex Cable

	Ordering Code	Fiber Type	Nominal Diameter mm	Fiber Count	Weight kg/km
SINGLEMODE	SM -I-DXK-2(1×2,8)x9AH-D-YE	G.652.D	2.8	2	7.2
	S SM-DXK-2(1×2,8)x9AH-DA1-YE	G.652.D/G.657.A1	2.8	2	7.2
	SM -I-DXK-2(1×2,8)x9AH-A1-YE	G.657.A1	2.8	2	7.2
	SM -I-DXK-2(1×2,8)x9AH-A2-YE	G.657.A2	2.8	2	7.2
	SM -I-DXK-2(1×2,8)x9AH-B3-YE	G.657.B3	2.8	2	7.2
MULTIMODE	SM -I-DXK-2(1×2,8)x9AH-OM1-OG	OM1	2.8	2	7.2
	SM -I-DXK-2(1×2,8)x9AH-OM2-OG	OM2	2.8	2	7.2
	SM -I-DXK-2(1×2,8)x9AH-OM3-TQ	OM3	2.8	2	7.2
	SM -I-DXK-2(1×2,8)x9AH-OM4-TQ	OM4	2.8	2	7.2