
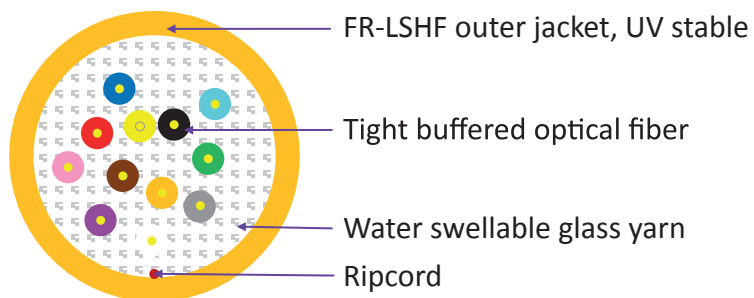


DESCRIPTION:

The cable consists of a tight buffered fibres; around the buffers is a layer of the water swellable glass yarns that act as tensile strength members; the jacket is made from the FR-LSHF compound. Ideal for indoor/outdoor applications and backbone networks in buildings. Suitable for direct termination with connectors.

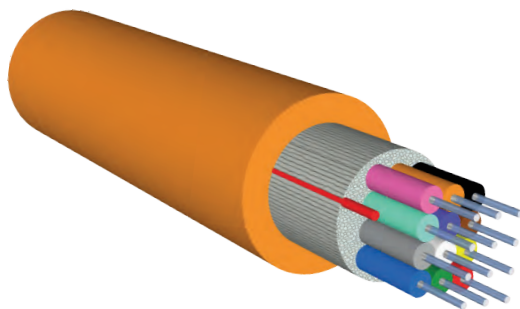

Indoor/Outdoor glass yarn protected Distribution Cable



SINGLEMODE MULTIMODE	Ordering Code	Fiber Type	Nominal Diameter mm	Fiber Count	Weight kg/km
	SM -U-DSTS-2(2×0,9)x9GH-D-YE	G.652.D	5.5	2	33
	SM -U-DSTS-2(2×0,9)x9GH-DA1-YE	G.652.D/G.657.A1	5.5	2	33
	SM -U-DSTS-2(2×0,9)x9GH-A1-YE	G.657.A1	5.5	2	33
	SM -U-DSTS-2(2×0,9)x9GH-OM1-OG	OM1	5.5	2	33
	SM -U-DSTS-2(2×0,9)x9GH-OM2-OG	OM2	5.5	2	33
	SM -U-DSTS-2(2×0,9)x9GH-OM3-TQ	OM3	5.5	2	33
	SM -U-DSTS-2(2×0,9)x9GH-OM4-TQ	OM4	5.5	2	33

SINGLEMODE MULTIMODE	SM -U-DSTS-4(4×0,9)x9GH-D-YE	G.652.D	6.0	4	40
	SM -U-DSTS-4(4×0,9)x9GH-DA1-YE	G.652.D/G.657.A1	6.0	4	40
	SM -U-DSTS-4(4×0,9)x9GH-A1-YE	G.657.A1	6.0	4	40
	SM -U-DSTS-4(4×0,9)x9GH-OM1-OG	OM1	6.0	4	40
	SM -U-DSTS-4(4×0,9)x9GH-OM2-OG	OM2	6.0	4	40
	SM -U-DSTS-4(4×0,9)x9GH-OM3-TQ	OM3	6.0	4	40
	SM -U-DSTS-4(4×0,9)x9GH-OM4-TQ	OM4	6.0	4	40

STECMAX®

DESCRIPTION:

The cable consists of a tight buffered fibres; around the buffers is a layer of the water swellable glass yarns that act as tensile strength members; the jacket is made from the FR-LSHF compound. Ideal for indoor/outdoor applications and backbone networks in buildings. Suitable for direct termination with connectors.

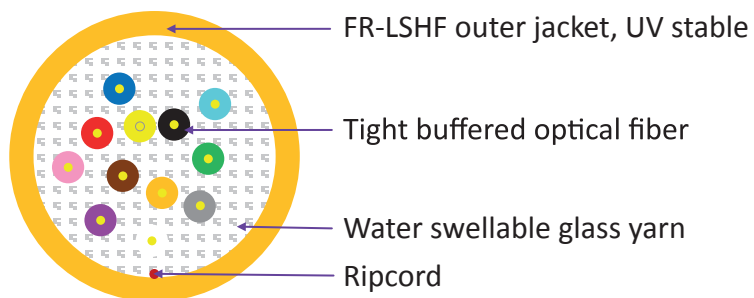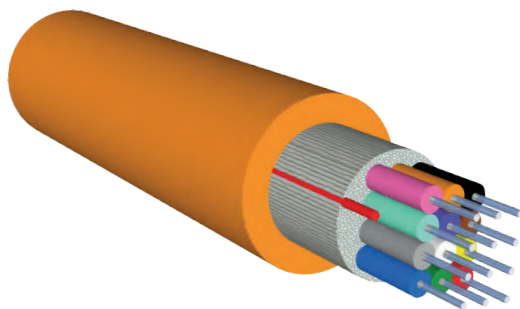

Indoor/Outdoor glass yarn protected Distribution Cable

SINGLEMODE MULTIMODE	Ordering Code	Fiber Type	Nominal Diameter mm	Fiber Count	Weight kg/km
	SM -U-DSTS-8(8×0,9)x9GH-D-YE	G.652.D	7.3	8	52
	SM -U-DSTS-8(8×0,9)x9GH-DA1-YE	G.652.D/G.657.A1	7.3	8	52
	SM -U-DSTS-8(8×0,9)x9GH-A1-YE	G.657.A1	7.3	8	52
	SM -U-DSTS-8(8×0,9)x9GH-OM1-OG	OM1	7.3	8	52
	SM -U-DSTS-8(8×0,9)x9GH-OM2-OG	OM2	7.3	8	52
	SM -U-DSTS-8(8×0,9)x9GH-OM3-TQ	OM3	7.3	8	52
	SM -U-DSTS-8(8×0,9)x9GH-OM4-TQ	OM4	7.3	8	52

SINGLEMODE MULTIMODE	SM -U-DSTS-12(12×0,9)x9GH-D-YE	G.652.D	8.3	12	66
	SM -U-DSTS-12(12×0,9)x9GH-DA1-YE	G.652.D/G.657.A1	8.3	12	66
	SM -U-DSTS-12(12×0,9)x9GH-A1-YE	G.657.A1	8.3	12	66
	SM -U-DSTS-12(12×0,9)x9GH-OM1-OG	OM1	8.3	12	66
	SM -U-DSTS-12(12×0,9)x9GH-OM2-OG	OM2	8.3	12	66
	SM -U-DSTS-12(12×0,9)x9GH-OM3-TQ	OM3	8.3	12	66
	SM -U-DSTS-12(12×0,9)x9GH-OM4-TQ	OM4	8.3	12	66

STECMAX®