
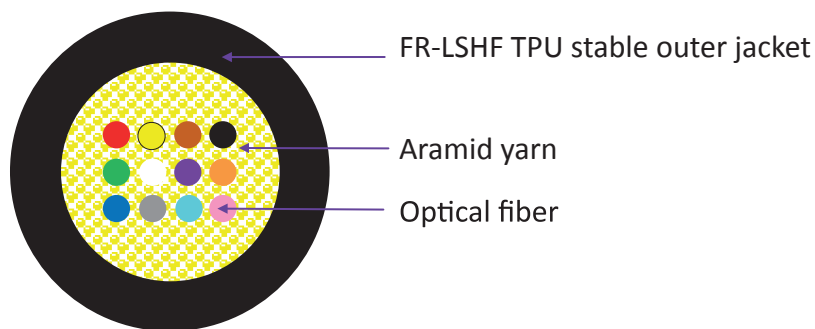


DESCRIPTION:

The cable consists of coloured 250 µm fibres; around the fibres is a layer of water swellable aramid yarns that act as tensile strength members; the jacket is made from the FR-LSHF TPU compound. The cable has a lightweight construction and a small diameter. Ideal for aerial installation over short distances.

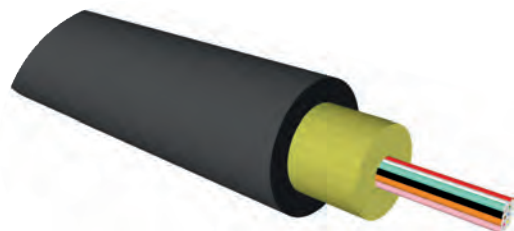

FTTx Universal Cable TPU

	Ordering Code	Fiber Type	Nominal Diameter mm	Fiber Count	Weight kg/km
SINGLEMODE	SM -U-DRP-2(2×0,25)FFAU-DA1-BK	G.652.D/G.657.A1	3.0	2	8.5
	SM -U-DRP-2(2×0,25)FFAU-A1- BK	G.657.A1	3.0	2	8.5
	SM -U-DRP-2(2×0,25)FFAU-A2- BK	G.657.A2	3.0	2	8.5
	SM -U-DRP-2(2×0,25)FFAU-B3- BK	G.657.B3	3.0	2	8.5
MULTIMODE	SM -U-DRP-2(2×0,25)FFAU-OM2- BK	OM2	3.0	2	8.5
	SM -U-DRP-2(2×0,25)FFAU-OM3- BK	OM3	3.0	2	8.5
	SM -U-DRP-2(2×0,25)FFAU-OM4- BK	OM4	3.0	2	8.5
SINGLEMODE	SM -U-DRP-4(4×0,25)FFAU-DA1-BK	G.652.D/G.657.A1	3.0	4	9.0
	SM -U-DRP-4(4×0,25)FFAU-A1- BK	G.657.A1	3.0	4	9.0
	SM -U-DRP-4(4×0,25)FFAU-A2- BK	G.657.A2	3.0	4	9.0
	SM -U-DRP-4(4×0,25)FFAU-B3- BK	G.657.B3	3.0	4	9.0
MULTIMODE	SM -U-DRP-4(4×0,25)FFAU-OM2- BK	OM2	3.0	4	9.0
	SM -U-DRP-4(4×0,25)FFAU-OM3- BK	OM3	3.0	4	9.0
	SM -U-DRP-4(4×0,25)FFAU-OM4- BK	OM4	3.0	4	9.0
SINGLEMODE	SM -U-DRP-8(8×0,25)FFAU-DA1-BK	G.652.D/G.657.A1	3.2	8	10.5
	SM -U-DRP-8(8×0,25)FFAU-A1- BK	G.657.A1	3.2	8	10.5
	SM -U-DRP-8(8×0,25)FFAU-A2- BK	G.657.A2	3.2	8	10.5
	SM -U-DRP-8(8×0,25)FFAU-B3- BK	G.657.B3	3.2	8	10.5
MULTIMODE	SM -U-DRP-8(8×0,25)FFAU-OM2- BK	OM2	3.2	8	10.5
	SM -U-DRP-8(8×0,25)FFAU-OM3- BK	OM3	3.2	8	10.5
	SM -U-DRP-8(8×0,25)FFAU-OM4- BK	OM4	3.2	8	10.5
SINGLEMODE	SM -U-DRP-12(12×0,25)FFAU-DA1-BK	G.652.D/G.657.A1	3.2	12	12.0
	SM -U-DRP-12(12×0,25)FFAU-A1- BK	G.657.A1	3.2	12	12.0
	SM -U-DRP-12(12×0,25)FFAU-A2- BK	G.657.A2	3.2	12	12.0
	SM -U-DRP-12(12×0,25)FFAU-B3- BK	G.657.B3	3.2	12	12.0
MULTIMODE	SM -U-DRP-12(12×0,25)FFAU-OM2- BK	OM2	3.2	12	12.0
	SM -U-DRP-12(12×0,25)FFAU-OM3- BK	OM3	3.2	12	12.0
	SM -U-DRP-12(12×0,25)FFAU-OM4- BK	OM4	3.2	12	12.0

