
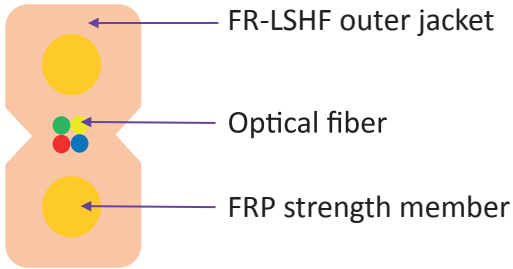


DESCRIPTION:

The cable consists of coloured 250 µm fibres; the jacket is made from the FR-LSHF compound. Two FRP members are embedded in the jacket. Ideal for indoor FTTH networks.

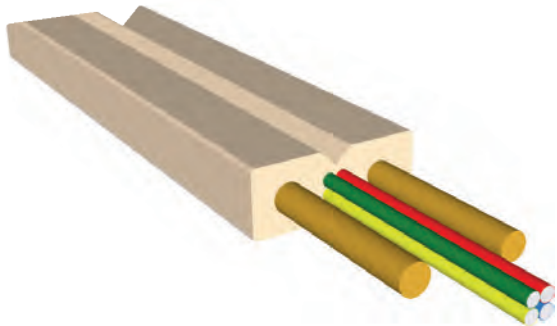

FTTx Drop Cable

	Ordering Code	Fiber Type	Nominal Diameter mm	Fiber Count	Weight kg/km
SINGLEMODE	SM -I-DRPM-2(2×0,25)FFTH-DA1-BK	G.652.D/G.657.A1	3,1x2,0	2	9.3
	SM -I-DRPM-2(2×0,25)FFTH-A1- BK	G.657.A1	3,1x2,0	2	9.3
	SM -I-DRPM-2(2×0,25)FFTH-A2- BK	G.657.A2	3,1x2,0	2	9.3
	SM -I-DRPM-2(2×0,25)FFTH-B3- BK	G.657.B3	3,1x2,0	2	9.3
MULTIMODE	SM -I-DRPM-2(2×0,25)FFTH-OM2- BK	OM2	3,1x2,0	2	9.3
	SM -I-DRPM-2(2×0,25)FFTH-OM3- BK	OM3	3,1x2,0	2	9.3
	SM -I-DRPM-2(2×0,25)FFTH-OM4- BK	OM4	3,1x2,0	2	9.3
SINGLEMODE	SM -I-DRPM-4(4×0,25)FFTH-DA1-BK	G.652.D/G.657.A1	3,1x2,0	4	9.5
	SM -I-DRPM-4(4×0,25)FFTH-A1- BK	G.657.A1	3,1x2,0	4	9.5
	SM -I-DRPM-4(4×0,25)FFTH-A2- BK	G.657.A2	3,1x2,0	4	9.5
	SM -I-DRPM-4(4×0,25)FFTH-B3- BK	G.657.B3	3,1x2,0	4	9.5
MULTIMODE	SM -I-DRPM-4(4×0,25)FFTH-OM2- BK	OM2	3,1x2,0	4	9.5
	SM -I-DRPM-4(4×0,25)FFTH-OM3- BK	OM3	3,1x2,0	4	9.5
	SM -I-DRPM-4(4×0,25)FFTH-OM4- BK	OM4	3,1x2,0	4	9.5